




EOCR-PMZ

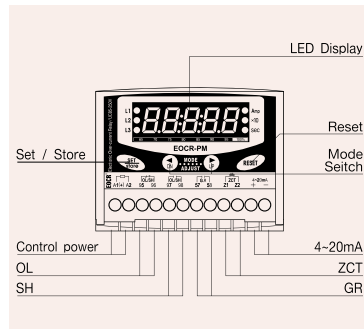

- MCU Based / Panel Mounting Type
- 3 Integral Current Transformers
- Over-current, Under current, Phase Loss, Phase Unbalance, Phase Reversal, Ground Fault. Locked Rotor Protection and current output(4~20mA)
- Digital Ammeter & Easy Troubleshooting
- Bar-graph Type LED Display
- Selectable Trip Time-Current Characteristics
- Independently Adjustable Starting Trip Delay and Operating Time


Protection

EOCR-PMZ			
Protective Item	Trip Time	Protective Item	Trip Time
Over-current	O-TIME	Ground fault	Preset Et time
Under-Current	Preset Ut time	Locked Rotor	0.5sec after d-time
Phase reversal	0.1~0.3sec	Stall	0.05~10sec
Phase Unbalance	8sec		

Specification

Model		PMZ	
Current Setting Range	Over-Current(oc)	Refer to current setting range(page 19)	
	Under-Current(uc)	Off / 0.5 ~ less than "oc" setting	
	Ground Fault Current(Ec)	Off	
Time Setting	Starting Delay Time(dt)	0.3 ~ 10A : definite time characteristics 0.3 ~ 1A definite / inverse time characteristics, selectable	
	Over-Current Trip Delay(ot)	Definite Time	0.2 ~ 30sec
		Inverse Time	1.0 ~ 30class(30curves)
	Under-Current Trip Delay(ut)	0.5 ~ 30sec, definite time characteristics, if "uc" mode is OFF, then OFF is displayed automatically in "ut" mode	
		Ground Fault Trip Delay(Et)	Definite / Inverse : 0.05, 0.1 ~ 1 ~ 10sec(curve-3)
Ground Fault Starting Delay(Ed)	OFF / 1 ~ 10sec		
Tolerance	Current	±5%	
	Time	±5%	
Control Power	24	24VAC/DC	
	220	85 ~ 250VAC/DC, 50/60Hz	
Contacts Rating	OL	2-SPST	3A / 250VAC Resistive
	GR	1-SPST	3A / 250VAC Resistive
Environment	Temperature	Store	-30 ~ 80°C
		Operation	-20 ~ 60°C
Display	Humidity	30 ~ 85% RH Non-Condensing	
	7-Segment LEDs	3 Phase current, Trip cause, Operating hour	
Bar-Graph	Load factor for current setting(50 ~ 100%)		
Insulation	Between casing and circuit : over 10MΩ, DC500V		
Dielectric Strength	Between casing and circuit	Between casing and circuit	2000VAC, 60Hz, 1min
	Between open contacts	Between open contacts	1000VAC, 60Hz, 1min
	Between circuit	Between circuit	2000VAC, 60Hz, 1min
Electrostatic Discharge	IEC61000-4-2	Lever 3 : Air Discharge : ±8kV, Contact Discharge : ±6kV	
Radiated Electromagnetic Field Disturbance	IEC61000-4-3	Lever 3 : 10V/m, 150MHz & 450MHz Portable transceiver	
EFT / Burst	IEC61000-4-4	Lever 3 : ±2kV, 1min	
Surge	IEC61000-4-5	Lever 3 : 1. × 50μs, ±4kV(0°, 90°, 180°, 270°)	
1MHz Burst disturbance	IEC61000-4-12	Lever 3 : 2.5kV, 1MHz	
Conducted Emission	EN55011	Class B	

Typical Wiring

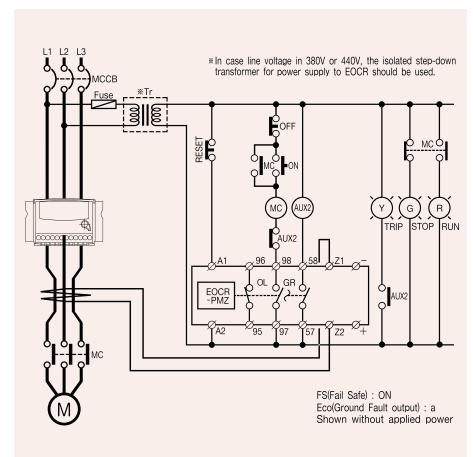

EOCR-PMZ (Terminal Type)